



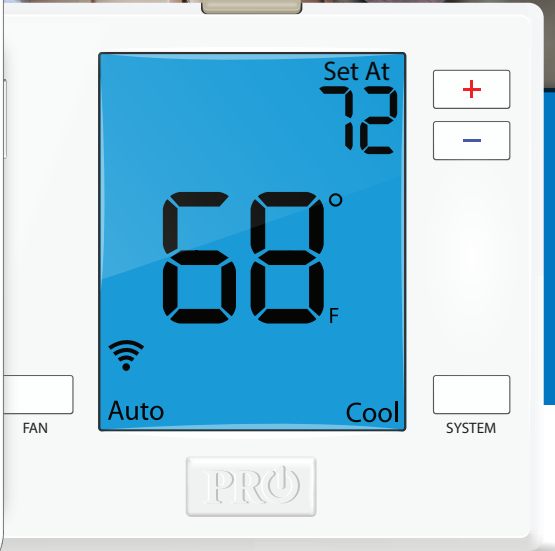

700 FAMILY

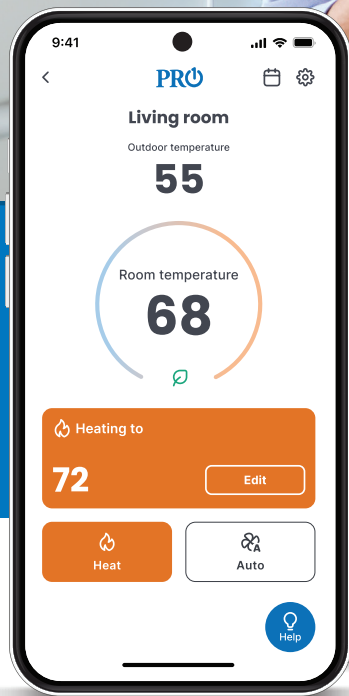

Exclusively For Professionals

700 FAMILY

Simple. Affordable. Professional.



Model #	7D 7 Day Programmable	5/1/1 5/1/1 Programmable	NP Non-Programmable	Stages Of Heat	Stages Of Cool	Heat pump Systems With Auxiliary	Conventional Systems	PTAC Mode	Display Size (square inches)	Filter Change Reminder Calibration	Room Temperature Adjustable	Adjustable Heat & Cool Temperature Swing	Programmable Fan	Adjustable Setpoint Limits	Auto Changeover	Memory Type (comment)	Remote Sensor Capable	Outdoor Temperature Sensor Capable	WiFi Ready	Fan Speeds	Warranty (years)	Terminals	
T771			NP	0/1	0/1	•		4		•	•	•	•	•						1	5	R, C, W/V, G	
T755S [▲]	7D	5/1/1	NP	4*	2	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O, S1, S2
T755	7D	5/1/1	NP	4*	2	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T751i	7D	**		4*	2	•	•		•	•	•	•	•	•	•	•	•	•	•	•	3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T751			NP	4*	2	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T731WO			NP	2*	1	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	3	5	R, C, Y, W, O, B, GH, GL
T731W			NP	2*	1	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	3	5	R, C, Y, W, O, B, GH, GL
T731			NP	2*	1	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	3	5	R, C, Y, W, O, B, GH, GL
T725	7D	5/1/1	NP	2*	1	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	1	5	R, C, Y, W/E, W2, G, B, O
T721i	7D	**		2*	1	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	1	5	Rh, Rc, C, Y, W/E, W2, G, B, O
T721			NP	2*	1	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	1	5	R, C, Y, W/E, W2, G, B, O
T715	7D	5/1/1	NP	2	2	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	1	5	Rh, Rc, C, Y, Y2, W, W2, G, B, O
T705	7D	5/1/1	NP	1	1	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	1	5	Rh, Rc, C, Y, W, G, B, O
T701i	7D	**		1	1	•	•	7	•	•	•	•	•	•	•	•	•	•	•	•	1	5	Rh, Rc, C, Y, W, G, B, O
T701			NP	1	1	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	1	5	Rh, Rc, C, Y, W, G, B, O

Programming** = Can only be modified through the app.
 Stages* = One less stage for conventional heat and cool.

▲ Wired accessories available for T755S
 R251S is an indoor remote temperature sensor
 R250S is an outdoor remote temperature sensor



The most commonly desired features at a great value with a model for nearly any system.

rev. 2505



1-800-PRO1-559 (776-1559)

PRO
 www.protiaq.com