




# T855SH

LIGHT COMMERCIAL/RESIDENTIAL WIRED REMOTE SENSING THERMOSTAT WITH HUMIDITY CONTROL

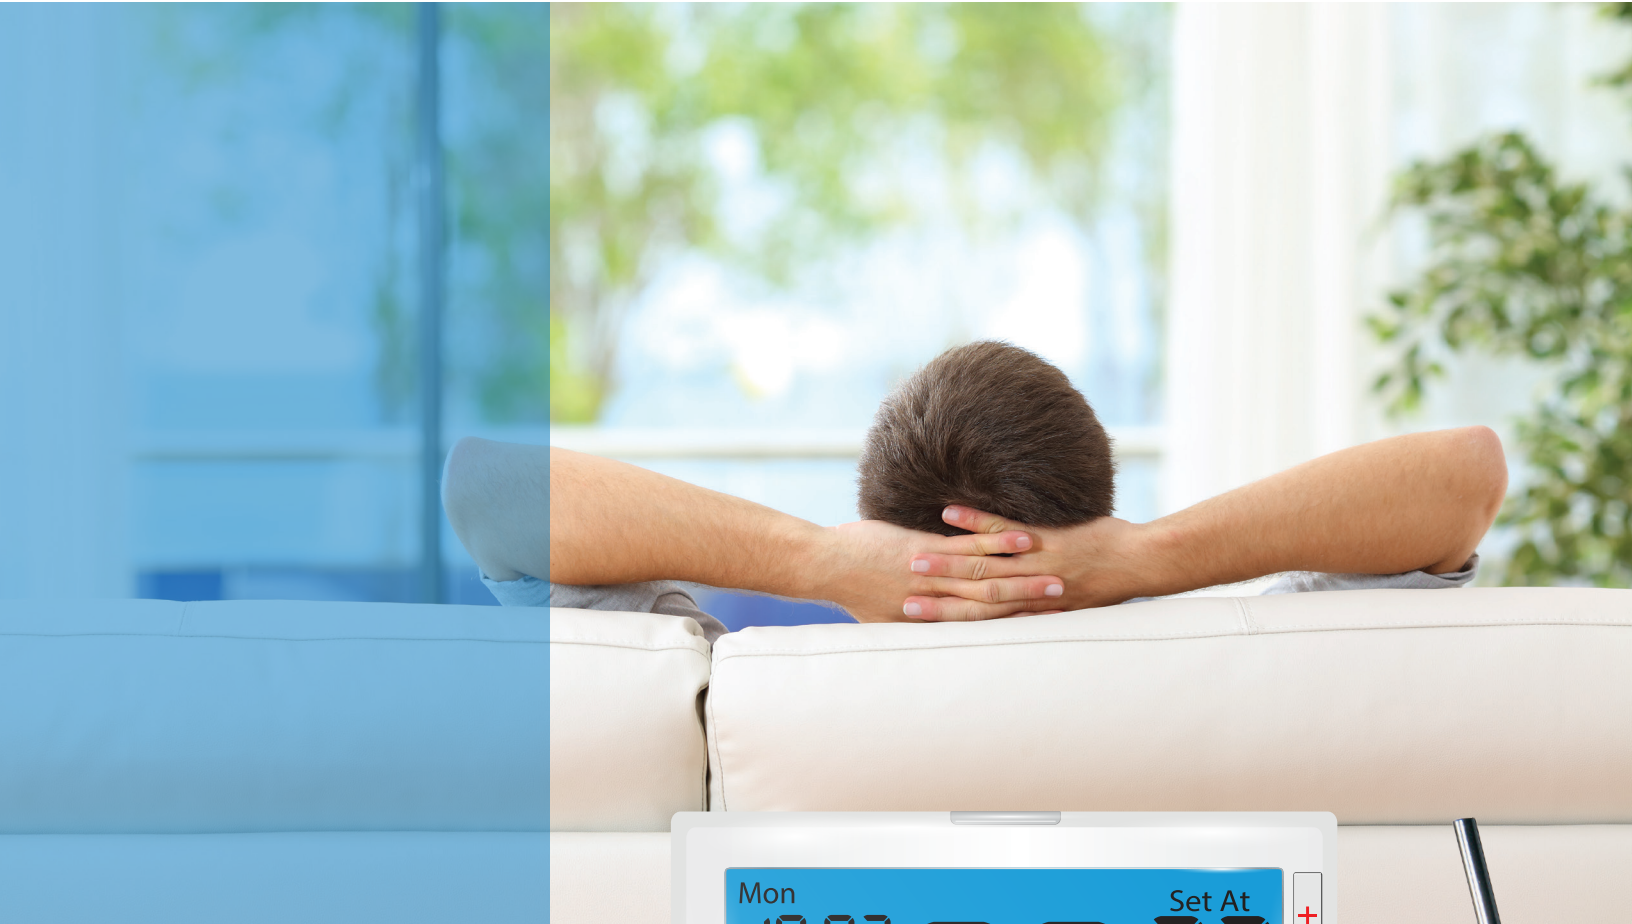

Exclusively For Professionals

# T855SH

LIGHT COMMERCIAL/RESIDENTIAL  
WIRED REMOTE SENSING THERMOSTAT  
WITH HUMIDITY CONTROL



	Commercial	7 Day Programmable	5/1/1 Programmable	Non-Programmable	Stages Of Heat	Stages Of Cool	Heat Pump Systems With Auxiliary	Conventional Systems	PTAC Mode	Display Size (square inches)	Filter Change Reminder Calibration	Room Temperature Adjustable	Adjustable Heat & Cool Temperature Swing	Programmable Fan	Adjustable Setpoint Limits	Auto Changeover	Memory Type (permanent)	Remote Sensor Capable	Outdoor Temperature Sensor Capable	WiFi Ready	Fan Speeds	Warranty (years)	Terminals			
	T855SH	C	7D	5/1/1	NP	5*	3*	•	•	•	8	•	•	•	•	•	•	•	•	•	•	•	•	•	3	5

Stages\* = 2 Stages For Conventional Heat & Cool

## Remote Sensing Options for the T855SH Thermostat

The T855SH can be configured in one of three ways with wired remote sensors to achieve maximum comfort in a space. These accessories are just another way PRO1 has improved comfort and efficiency at a low cost to home and building owners.

### Outdoor remote Sensing

The R250S can be used as an outdoor temperature sensor to set a Dual Fuel Balance Point. This feature chooses the most efficient heat source based on the outside temperature. At this predetermined point the system will automatically choose the best heating source to save energy.

### Slab Sensing

The R250S can also be used as a floor sensor in Radiant Heating applications. By sensing the temperature at the heat source, this accessory greatly improves the comfort of the space and the efficiency of the heating system.

### Indoor Remote Sensing

The R251S provides a better level of comfort by averaging as many as 16 different sensing points. Additional indoor sensors increase the accuracy of the temperature reading throughout a home.



rev. 2040



1-800-PRO1-559 (776-1559)

PRO  
www.pro1iaq.com